
Vault


C-Scroll


Roundel

These installation instructions are valid with the above Ametrix styles.

Small, INDOOR
YI
(Standard, Yoke mount, Integral ballast)
Visor and Non-Visor

Warning: Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. **Do not** mount fixtures vertically.

Part call-out

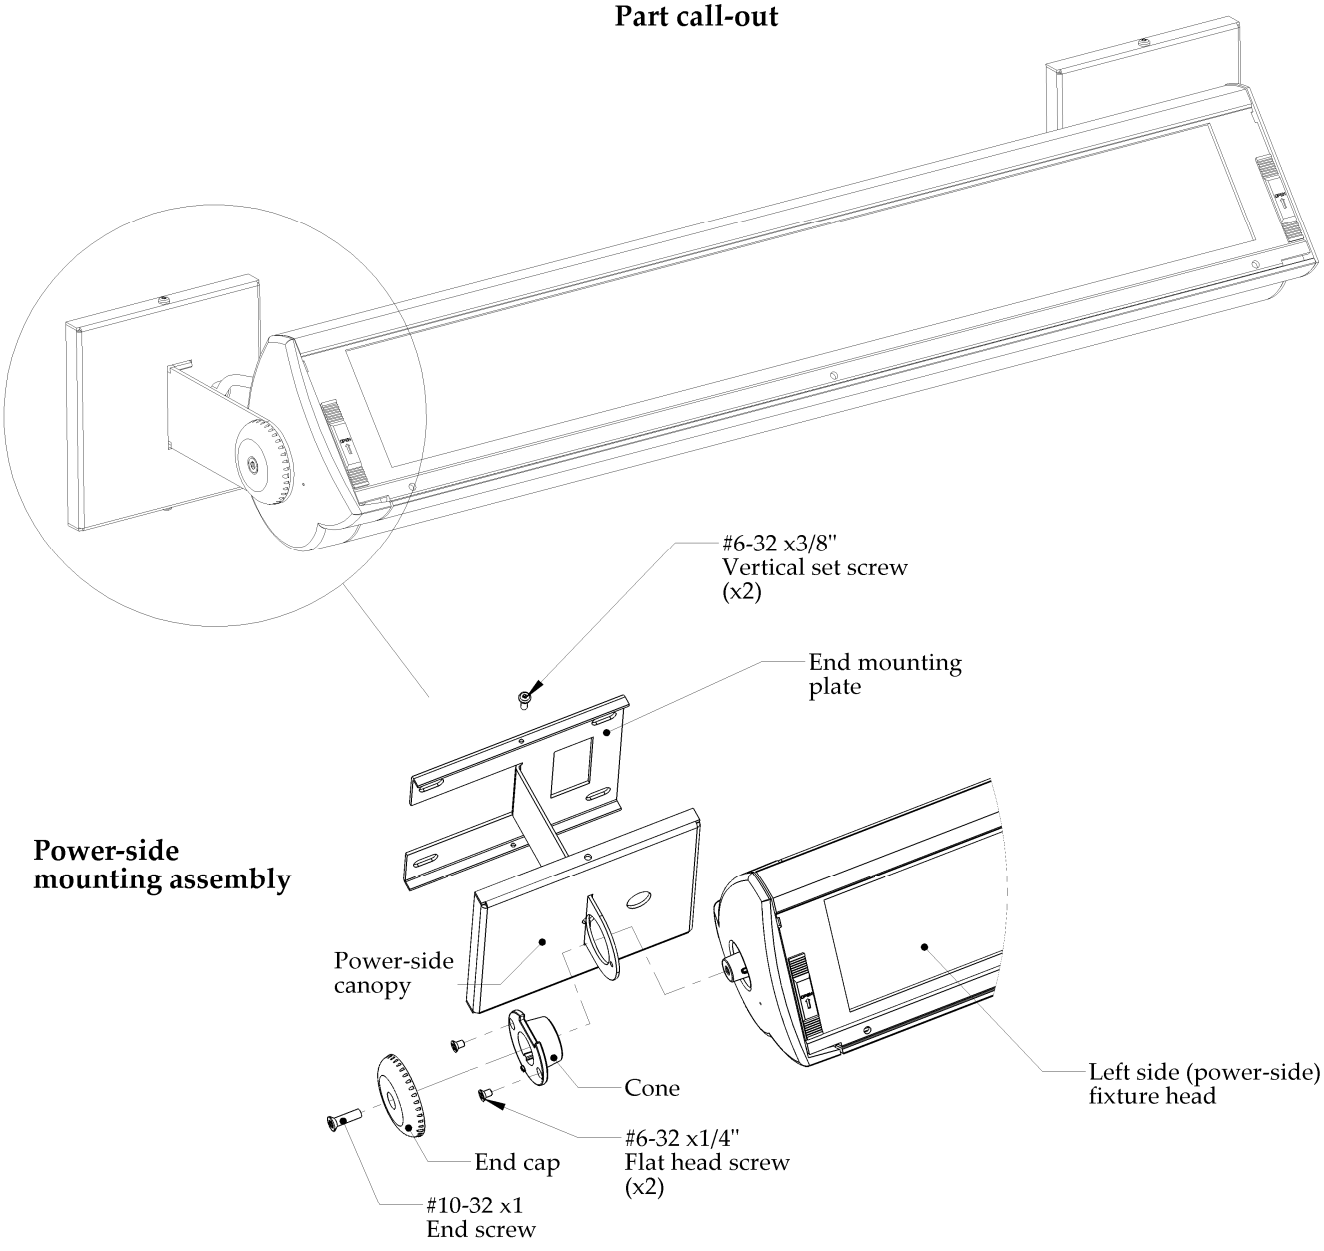

Power-side mounting assembly

Ametrix
4675 Holly Street
Denver, CO 80216
P: 303-393-1522
www.ametrixlighting.com

Cooper Lighting
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com


Vault


C-Scroll


Roundel

These installation instructions valid with the above Ametrix styles.

Small, INDOOR
YI
(Standard, Yoke mount, Integral ballast)
Visor and Non-Visor

Warning: Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician.

1 Mounting the fixture brackets

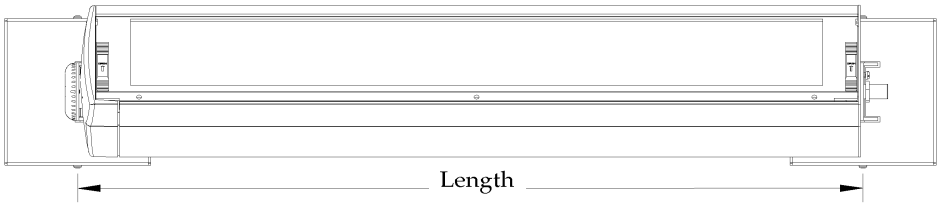

Available Wattages	Available Lamp Types	Mounting plate centers in(mm)
14W	(T5)	27 3/4 (685.8)
17W	(T8)	
24W	(T5 HO)	

21W	(T5)	39 11/16 (990.6)
25W	(T8)	
39W	(T5 HO)	

28W	(T5)	46 13/32 (1168.4)
32W	(T8)	
54W	(T5 HO)	

Prior to roughing in J-boxes:

1. Determine the location of standard fixtures.
2. Install outdoor rated J-boxes(by others). Refer to power orientation supplementary sheet for installation details.
3. Using the dimensions provided, mount both hub assemblies on center before mounting the fixture head.

2 Assembling the power-side mounting bracket

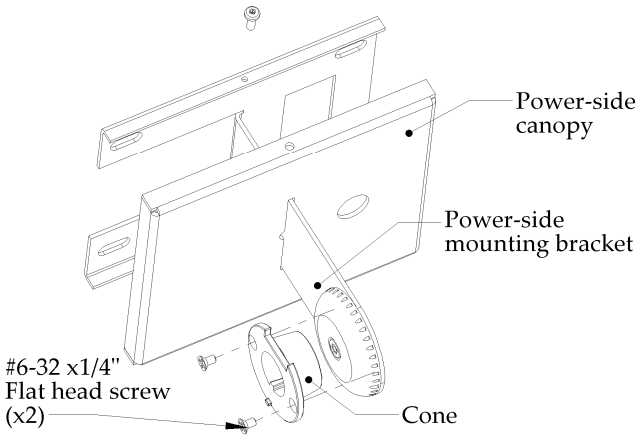

1. Once bracket is mounted, slide canopy cover over end mounting bracket and leave loose.
2. Using both #6-32 x1/4" Flat head screws, secure cone to mounting bracket.

* Dimensions of mounting bracket are the same for both center and end brackets and can be found on page four.

3 Securing fixture to mounting brackets

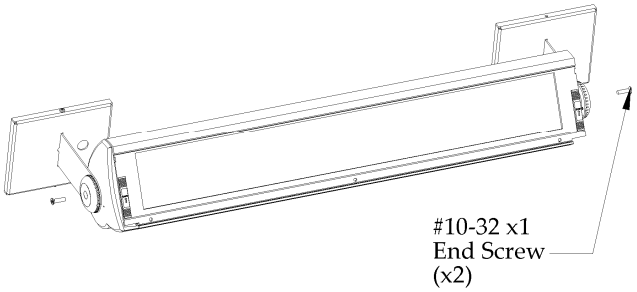

1. Insert fixture between mounting brackets and loosely secure with both #10-32 x1 end screws.
2. Once fixture is safely secure, attach all wires from power-side bracket. Ensure all connections are properly matched. Hide splice behind canopy and secure canopy with vertical set screws.
3. Fully secure fixture at desired angle by tightening #10-32 x 1 end screw through end cap on both sides of fixture.

Ametrix
4675 Holly Street
Denver, CO 80216
P: 303-393-1522
www.ametrixlighting.com

Cooper Lighting
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Printed in USA

COOPER Lighting


Vault w/ visor


C-Scroll w/ visor


Roundel w/ visor

These installation instructions are valid with the above Ametrix styles

Small, INDOOR
YI
(Standard, **Y**oke mount, **I**ntegral ballast)
Visor and Non-Visor

Warning: Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. **Do not** mount fixtures vertically.

Mounting Plate Dimensions In [mm]

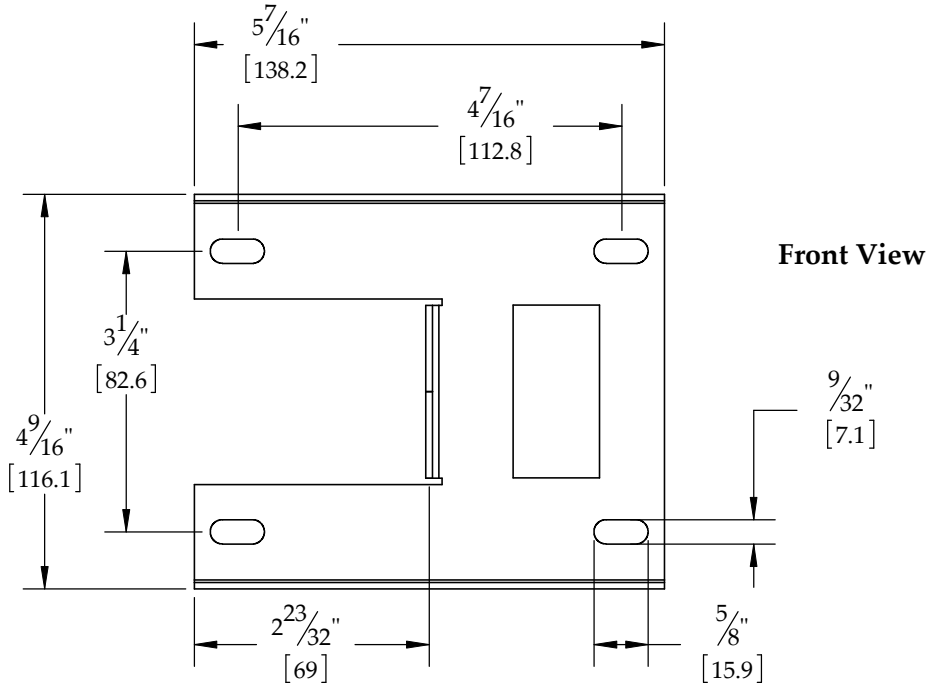

Front View

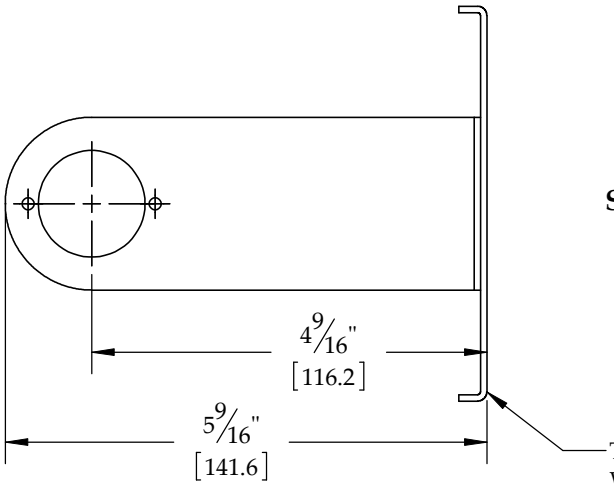

Side View

Ametrix
4675 Holly Street
Denver, CO 80216
P: 303-393-1522
www.ametrixlighting.com

Cooper Lighting
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com